

## **The Fairbanks Company**


202 Division Street • P.O. Box 1871 • Rome, GA 30162

**Toll Free:** 800-831-0022 • **Fax:** 800-576-2239

**Email:** [info@fairbankscasters.com](mailto:info@fairbankscasters.com) • **Web Address:** [www.fairbankcaster.com](http://www.fairbankcaster.com)

importscaffold

- Deep toothed gears for firm rotational lock.
- Extra long cam lock lever for ease of positive down locking.
- Brake arm integral with fork legs -- No welds!.
- Nylon grease seal on upper raceway.
- Full tread width wheel lock with exceptional rigidity.
- Zinc plated finish for weather resistance.
- Easy access zerk fitting for lubricating.
- Nylon center lock nuts on wheel axle and brake lever.
- All specifications exceed OSHA safety requirements

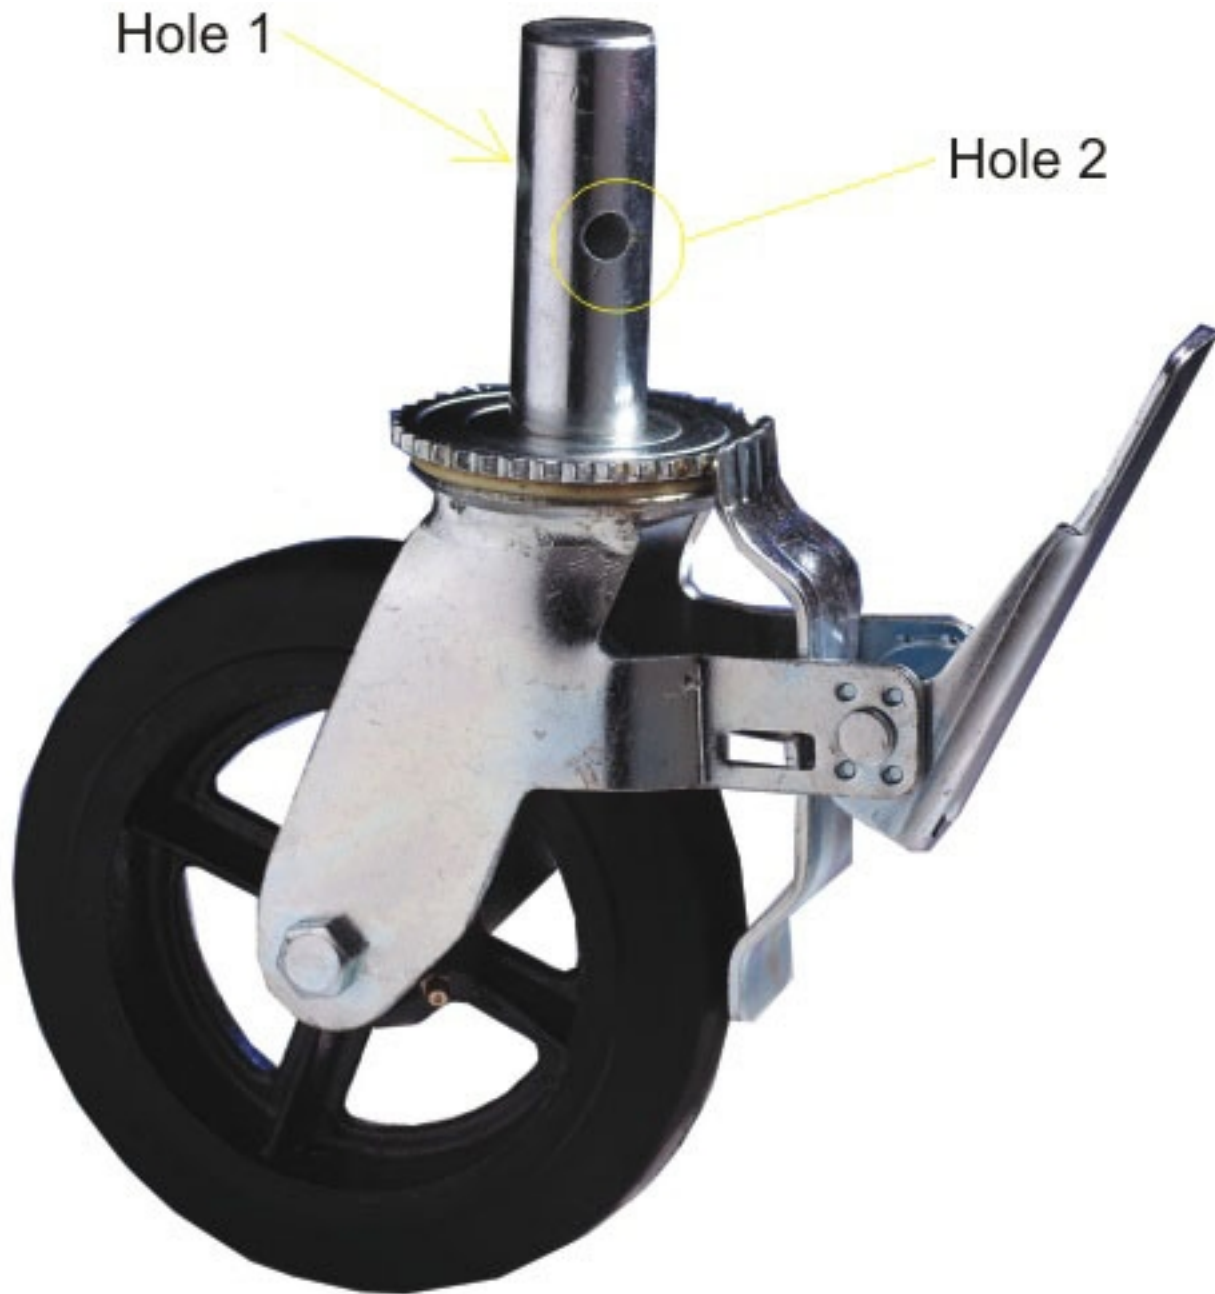

Item #	Stem Diameter	Stem Height	Drift Pin Hole Diameter	1st Hole Height	2nd Hole Height	Load Capacity
E-DB92x2-8RT	1 3/8"	4"	1/2"	2"	2 1/2"	500 lbs
E-DB92x3-8RT	1 7/16"	4"	1/2"	2"	2 1/2"	500 lbs
E-DB92x4-8RT	1 1/4"	4"	1/2"	2"	2 1/2"	500 lbs